

Series 16

HARDWARE DOCUMENTATION

**DDP-516
Paper Tape Reader Option
Model 516-50/9550**

INSTRUCTION MANUAL

This manual contains a description of the DDP-516 Paper Tape Reader Option, Model 516-50/9550, and its operation. A parts list, logic block diagrams, and special circuit module descriptions are included.

DOC.NO. 130071642F ■ ORDER NO. M-973 ■ OCT. 1970

Honeywell

COPYRIGHT © 1966, 1967, 1968, 1969, 1970, HONEYWELL INC.
 COPYRIGHT © 1971, HONEYWELL INFORMATION SYSTEMS INC.

The information contained herein is the exclusive property of Honeywell Information Systems Inc., except as otherwise indicated, and shall not be disclosed or reproduced, in whole or in part, without explicit written authorization from the company. The distribution of this material outside the company may occur only as authorized.

REVISION HISTORY

New Revision Level of Manual	Change No.	Effective Date	Number and New Revision Level of Affected Drawings	Pages Affected by Revision
C	4239	May 1968	015353D 015354D 015347D	9/10 11/12 17/18
D	5608	June 1968	015357E	7/8 17/18
E	5609	Aug. 1968	015353E 015354E	9/10 11/12 A-1; Deleted CC-060 and CC-127 PACs
F	5714	Oct. 1968	015353F 015354F	9/10 11/12 5 7/8 A-1: Add CC-272 PAC

Publications Department, Field Engineering Division, Newton, MA 02161

Printed in the United States of America
 All rights reserved

CONTENTS

	<u>Page</u>
Introduction	1
Reference Data	1
Physical Characteristics	1
Functional Description	1
Tape Format	2
Power Requirements	2
Operation	2
Maintenance	2
Installation	2
Connector and PAC Layout	2
Interface Connections	3
Theory of Operation	3
Run Command	3
Time A	3
Time B	3
Stop Command	5
Parts List	6
Appendix μ -PAC Descriptions	A-1

ILLUSTRATIONS

<u>Figure/LBD No.</u>		<u>Page</u>
1	Tape Format	2
2	Tape Reader Interface, Block Diagram	4
3	Tape Reader Interface Timing	5
0.300	Paper Tape Reader Control	9
0.301	Paper Tape Reader Buffer Registers	11
0.302	Connectors Paper Tape Reader	13
0.303	Paper Tape Reader Device Cable	15
0.304	PAC Allocation Paper Tape Reader Option	17
014290	Punch/RDR Main Assembly Drawing	19

TABLES

		<u>Page</u>
1	Function Index	6
2	Parts List	7

DDP-516-50 PAPER TAPE READER

INTRODUCTION

The DDP-516-50 Paper Tape Reader Option consists of an unmodified Digitronics Perforated Tape Reader (Model 2500) and one 1 x 3 assembly of interface logic linking the paper tape reader to the main frame of the DDP-516 General Purpose Computer. This document provides technical information on the interface logic.

Reference Data

The following manuals are recommended for supplementary reference:

Technical Manual, Perforated Tape Reader, Model 2500 (Digitronics Corp.)

Programmers Reference Manual for the DDP-516 General Purpose Computer, 3C Doc. No. 130071585

Interface Manual for DDP-516 General Purpose Computer, 3C Doc. No. 130071624

Installation Manual for DDP-516 General Purpose Computer, 3C Doc. No. 130071625

Instruction Manual for μ -PAC Integrated Circuit Modules, 3C Doc. No. 130071369

Physical Characteristics

The paper tape reader is 10 in. wide and 6 in. high. It extends 10-5/8 in. behind the front panel and 2-3/8 in. in front of the panel. The reader weighs approximately 15 lb and is secured to a rack mount adapter panel for mounting in the 3C Paper Tape Equipment Cabinet. The reader is linked to the control module logic BLOC by a control cable with a maximum permissible length of 50 ft. (LBD No. 0.303). The interface logic BLOC mounts in any available BLOC location in a DDP-516 or satellite cabinet.

Functional Description

The paper tape reader is unidirectional and reads eight-level tape continuously at a slewing rate of 300 characters per second. When operated in an asynchronous start/stop mode, the reader is capable of stopping on the next character at a maximum slew rate of 300 characters per second. All eight data levels are read from the tape to the device buffer and transferred intact to the DDP-516 input data bus. Tape leader characters are transferred as an all ZERO configuration.

For additional information, refer to the Programmers Reference Manual for DDP-516 General Purpose Computer, 3C Doc. No. 130071585.

Tape Format

The paper tape reader uses standard 8-level tape punched in the format shown on Figure 1.

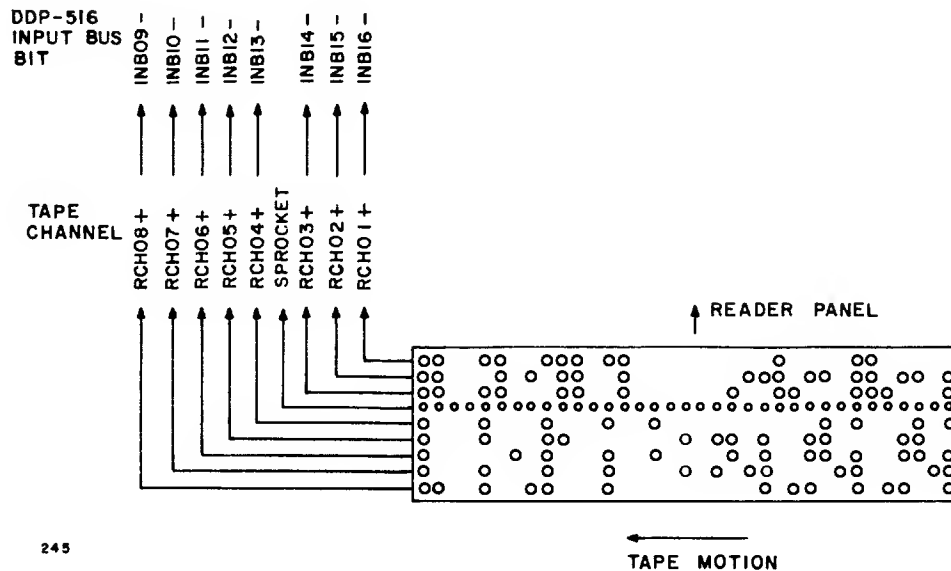


Figure 1. Tape Format

Power Requirements

The DDP-516-50 paper tape reader requires 105 Vac to 125 Vac, single phase, 60 Hz at 125 W. The DDP-516-9550 requires 105 Vac to 125 Vac, single phase, 50 Hz at 125 W.

Operation

Operating instructions for the paper tape reader are given in the Technical Manual for Paper Tape Reader, Model 2500 (Digitronics Corp.) and in the Programmers Reference Manual for the DDP-516 General Purpose Computer, 3C Doc. No. 130071585.

Maintenance

The paper tape reader data channels may require alignment and the pinch roller should be checked periodically. Refer to the technical manual for Digitronics Perforated Tape Reader for the maintenance procedures and recommended period of inspection and preventive maintenance. The interface requires no special maintenance.

INSTALLATION

Connector and PAC Layout

The paper tape reader mechanism mounts in a special paper tape equipment cabinet and the interface logic is contained within a standard 1 x 3 μ -BLOC. Connector and PAC locations within the BLOC are as shown on LBD No. 0.304 and connector pin assignments are shown on LBD No. 0.302.

Interface Connections

The DDP-516 I/O bus and the paper tape reader are connected through cable μ -PACs. Signal name and pin connections are shown on the logic diagrams. Pin assignments between the paper tape reader connector and the interface cable μ -PAC are shown on LBD No. 0.303. All wires are number 24 red/black twisted pairs, and can have a maximum length of 50 ft.

THEORY OF OPERATION

In general operation, the paper tape reader responds to two OCP functions: reader start and reader stop. When the reader is started, data characters are dropped into an 8-bit buffer register and stored until an input data transfer to the DDP-516 is accomplished. The tape slews at a speed which causes a new character to be dropped into the register every 3.3 ms. Input data transfer is accomplished by an INA instruction.

A standard interrupt provision is included as part of the interface, with the mask flip-flop responding to bit nine on the output bus.

The main subdivisions of interface logic and the data and control lines exchanged with the DDP-516 and reader mechanism are shown on Figure 2. An analysis of the paper tape reader interface logic is presented in the following paragraphs. The timing of tape reader data cycles is illustrated in Figure 3 and definitions of mnemonics are contained in Table 1.

Run Command

When OCP '0001 is detected by the coincidence of 0CPXX+, ADB10-A, and RADXX+A, the run/stop flip-flop is set. The assertion output of the flip-flop is powered through a parallel NAND gate structure and level shifter to produce -6v on the RNSTP+ line to the reader mechanism. The reader brake disengages, the pinch roller engages, and the tape begins to slew.

Time A

Time A starts with tape motion (see Figure 3). The interface waits for synchronization with the paper tape reader sprocket signal (RSHXX+). When a sprocket hole passes over the sprocket channel photodiode, a negative-going RSHXX+ sprocket pulse is generated. Time A is terminated with the leading edge of RSHXX+ which in turn starts time B. The next time A and every time A thereafter, until tape motion stops, is initiated with the leading edge of RRLAD-.

Time B

During time B, data is strobed by DIPXX+, through level converters, to the interface buffer register. The manner in which the DDP-516 accepts the character depends on whether standard interrupt or programmed I/O is in effect.

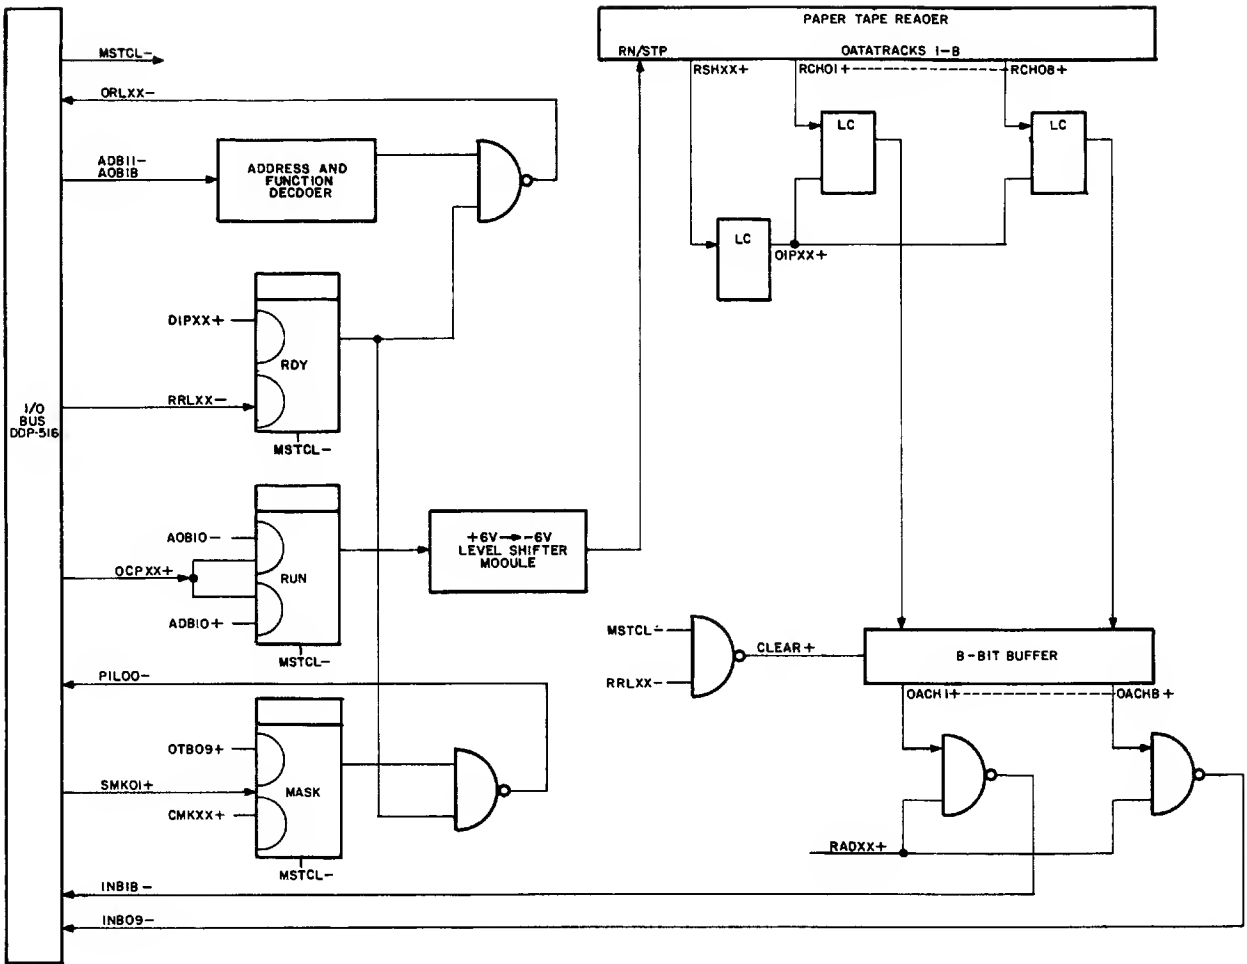


Figure 2. Tape Reader Interface, Block Diagram

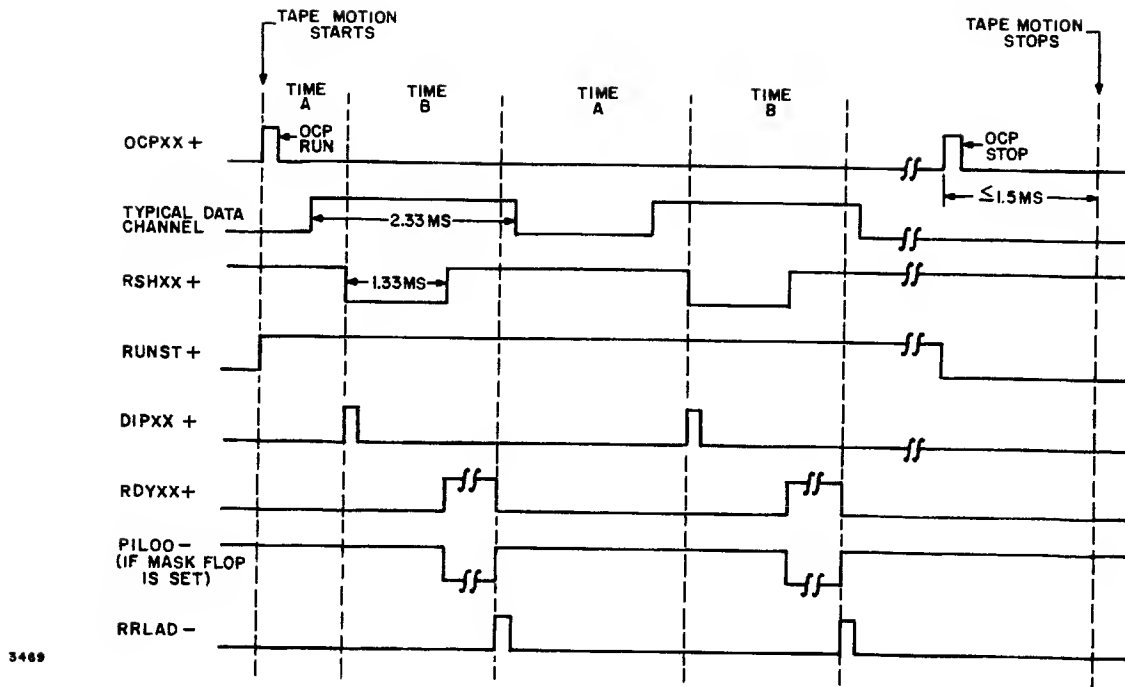


Figure 3. Tape Reader Interface Timing

If standard interrupt is being used and the mask flip-flop is set, the ready flip-flop causes the P1L00- priority interrupt line to go to ground. If the DDP-516 performs an SKS '0401, the presence of INTXX- inhibits the DRL1N- line as an indication of an interrupt by the tape reader interface. This subsequently leads to the addressing of an INA '0001 or '1001 by the DDP-516 to transfer the contents of the reader buffer register into the DDP-516 A-register.

When an INA '0001 or '1001 is executed, either as a response to the P1L00- interrupt signal or in the course of a programmed I/O, the RRLAD- pulse is generated. This pulse resets the ready flip-flop, deenergizing P1L00-. For the duration of the device address, the RDADX+A and RDADX+B levels gate the contents of the buffer register to input bus lines 1NB09- through 1NB16-. During the RRL period, the DDP-516 accepts the data. At the leading edge of RRLAD-, the ready flip-flop (RDYXX+) is reset and the reset pulse CLEAR+ is generated to reset the buffer register. The interface then returns to time A to await the next sprocket signal.

Stop Command

If an OCP '0101 is received during time A (OCPXX+ gated with ADB10+A and RADXX+), the RUNST+ flip-flop is reset and the interface returns to the reset condition. The RNSTP+ level returns to ground, engaging the tape reader brake and disengaging the pinch roller. The tape stops within 1.5 ms after RNSTP+ returns to ground.

Table 1.
Function Index

<u>Mnemonic</u>	<u>Definition</u>	<u>LBD/Zone</u>
CLEAR+	Reader clear pulse. Developed from the system normalize, master clear or reset ready line pulse.	0.300 H10
CMKXX-A	Clear mask flip-flop	0.300 L10
D1PXX+A D1PXX+B	Drop-in pulse. Strokes the data from the reader into the buffer register.	0.300 E10/E11
P1L00-	Priority interrupt level. Signals computer that reader is interrupting.	0.300 L8
RADXX+A RADXX+B	Reader address.	0.300 C2/C3
RCH01+ through RCH08+	Reader data channels.	0.302
RDYXX+	Ready flip-flop. Set with the drop-in pulse and reset when the computer strokes the input bus.	0.300 F1
RMASK+	Mask status flip-flop for the standard interrupt line.	0.300 F8
RNSTP+	Run/stop to the paper tape reader.	0.300 K4
RRLAD-	Reset ready line pulse. Gated with the reader address.	0.300 B4
RSHXX+	Reader sprocket pulse.	0.302
SMK01+	Set mask flip-flop for standard interrupt.	0.302
ST0CP-	Reader stop pulse.	0.300 C5

PARTS LIST


Table 2 contains the replaceable parts for the Paper Tape Reader option. Component parts for the μ -PAC digital modules, unless stated otherwise in the description, will be found in the associated documents listed below:


335 Series	Doc. No. 130071369
All others	Doc. No. 130071620

Reference (location) designations are variable and will be determined from the applicable system coding drawing.

Table 2.
Parts List for DDP-516-50 Paper Tape Reader

Reference Designation	Description	3C Part No.	Quantity Required
	TAPE READER--8 channels at 300 characters/second; unidirectional; panel mtd; DIGITRONICS Model 2500; for component parts refer to vendor's manual	964 500 001	1
	μ-PAC DIGITAL MODULE -- delay multivibrator	Model CC-060	1
	μ-PAC DIGITAL MODULE -- gated flip-flop	Model CC-089	1
	μ-PAC DIGITAL MODULE -- buffer register	Model CC-092	1
	μ-PAC DIGITAL MODULE -- diode resistor	Model CC-272	1
	μ-PAC DIGITAL MODULE -- transfer gate	Model CC-152	1
	μ-PAC DIGITAL MODULE -- multi-input NAND gate	Model DC-335	1
	μ-PAC DIGITAL MODULE -- NAND gate Type 1	Model DI-335	2
	μ-PAC DIGITAL MODULE -- expandable NAND gate	Model DN-335	1
	μ-PAC DIGITAL MODULE -- negative logic level converter; for component parts refer to 3C Doc. No. 130071620	Model LC-335	1
	μ-PAC DIGITAL MODULE -- transfer gate	Model TG-335	1
	CONNECTOR PLANE ASSY -- c/o one 1 x 3 connector block, special level shift module and associated parts; except for module factory repairable only	1015389-701	1
	LEVEL SHIFT MODULE -- c/o printed wiring board, diode and resistor; 3-wire pin terminals; o/a dim. 0.150 in. w by 0.305 in. max h by 1.835 in. lg excl terminals	2011608-701	1
	PRINTED WIRING BOARD -- etched wiring one side	2011522-001	1
	RESISTOR, COMPOSITION -- 910 ohms, 5%, 1/2w; MIL Type RC20GF911J	932 004 048	1
	SEMICONDUCTOR, DIODE -- 1N705A	943 102 010	1
	CABLE ASSY, SPECIAL PURPOSE -- c/o 10-pairs cabled and covered w/insulating sleeve; one end printed wiring board; other end 23-pin connector; o/a length 50 ft	1015331-701	1
	PRINTED WIRING BOARD -- μ-PAC configuration w/o components; incl cable clamp, clamping bar and plate	2013625-701	1
	CONNECTOR, PLUG -- 23 female contacts; incl jackscrews and rt ang cable clamp; U.S. COMPONENTS UPCC-F-2HSL-23	--	1
	CABLE, SPECIAL PURPOSE -- twisted pair; #24 AWG; stranded conductors w/plastic insulation	940 352 001	500 ft
	CABINET, ELECTRICAL EQUIPMENT -- provides external mounting for both tape reader and/or tape punch (516-52 option); configuration and finish color to be specified by system requirements		1

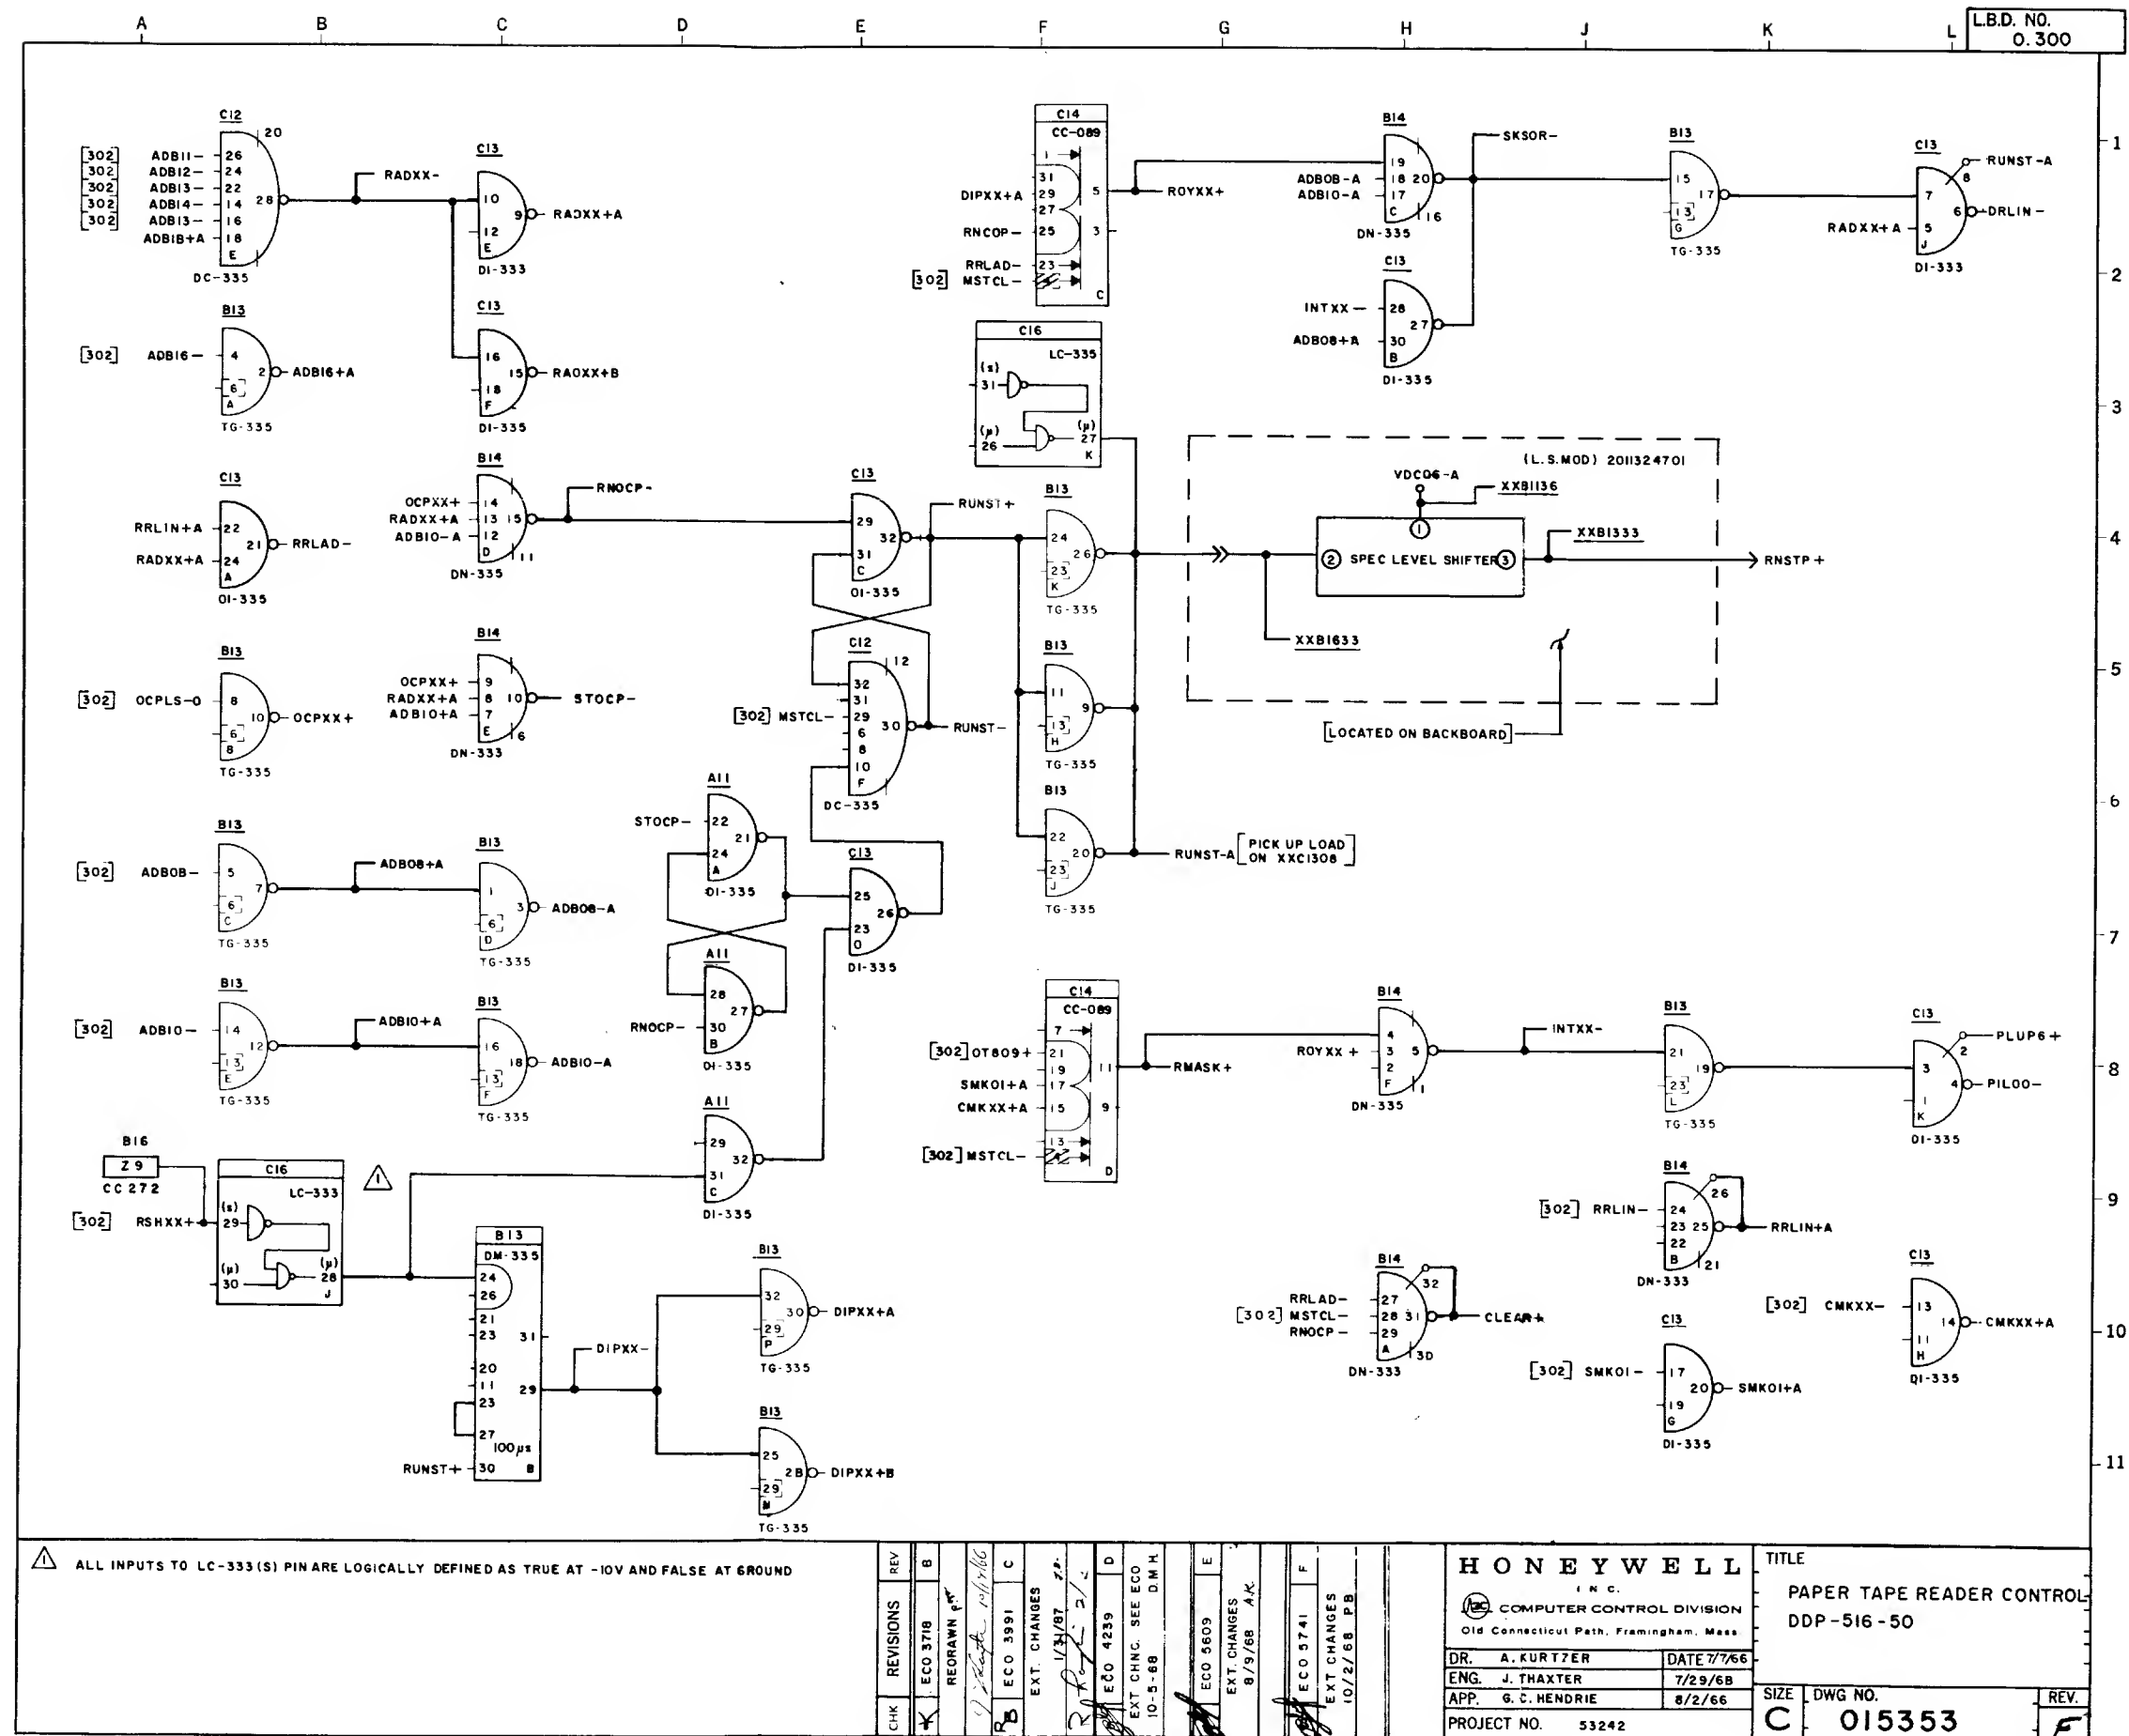

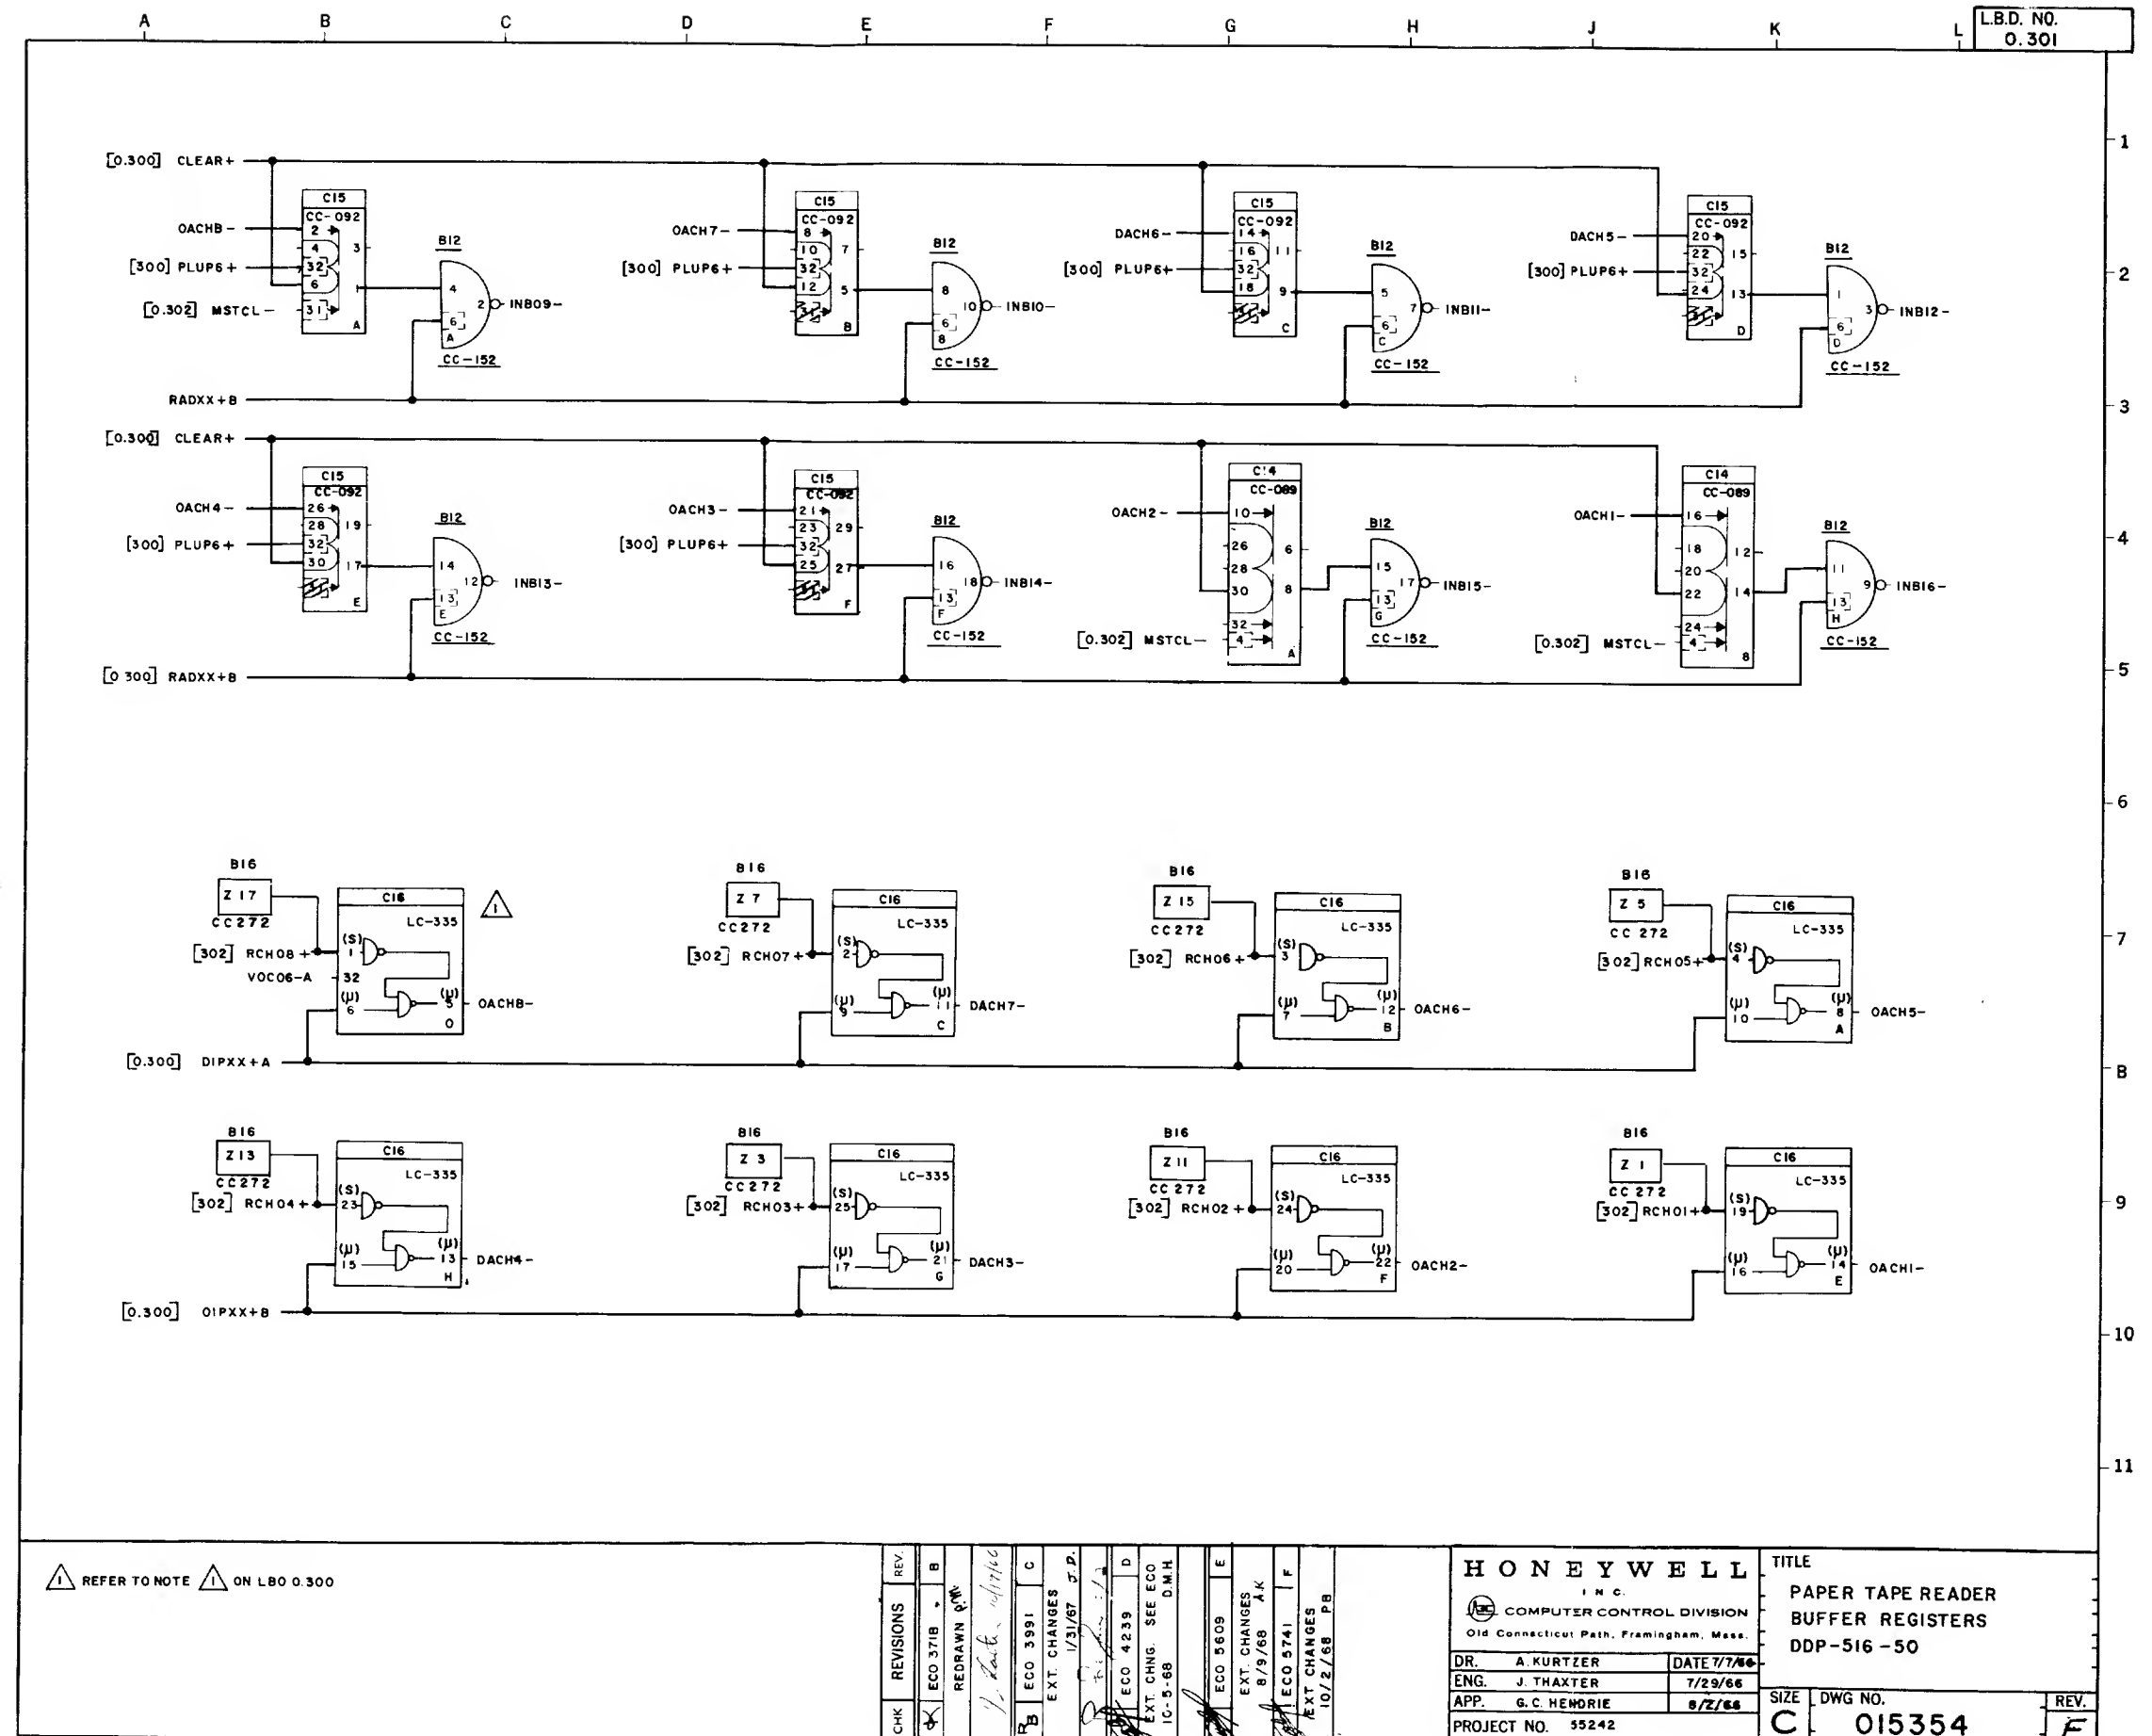

L.B.D. NO. 304

4

LDC	PAC	A	B	C	D	E	F	G	H	J	K	L	M	N	P
8															
7															
6															
5															
4															
3															
2															
1															

3

LOC	PAC	A	B	C	D	E	F	G	H	J	K	L	M	N	P
8															
7															
6															
5															
4															
3															
2															
1															

2

LDC	PAC	A	B	C	D	E	F	G	H	J	K	L	M	N	P
8															
7															
6															
5															
4															
3															
2															
1															

1

LOC	PAC	A	B	C	D	E	F	G	H	J	K	L	M	N	P
8															
7															
6															
5															
4															
3															
2															
1	DI-335	X	X	X											

1

2

LOC	PAC	A	B	C	D	E	F	G	H	J	K	L	M	N	P
8	CONN														
7	CONN														
6															
5	DM-335	X													
4	DM-335	X	X	X	X	X	X								
3	TG-335	X	X	X	X	X	X	X	X	X	X	X	X	X	X
2	CC152	X	X	X	X	X	X	X	X						
1	CONN														


0

0

LDC	PAC	A	B	C	D	E	F	G	H	J	K	L	M	N	P
8	CONN														
7															
6	LC-335	X	X	X	X	X	X	X	X	X	X	X	X	X	X
5	CC092	X	X	X	X	X	X	X	X						
4	CC089	X	X	X	X										
3	DI-335	X	X	X		X	X	X	X	X	X	X	X	X	X
2	DC-335					X	X								
1	CONN														

NOTES:
1 I/O BUS JUMPER CABLES
2 DEVICE CABLE

REVISIONS
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1

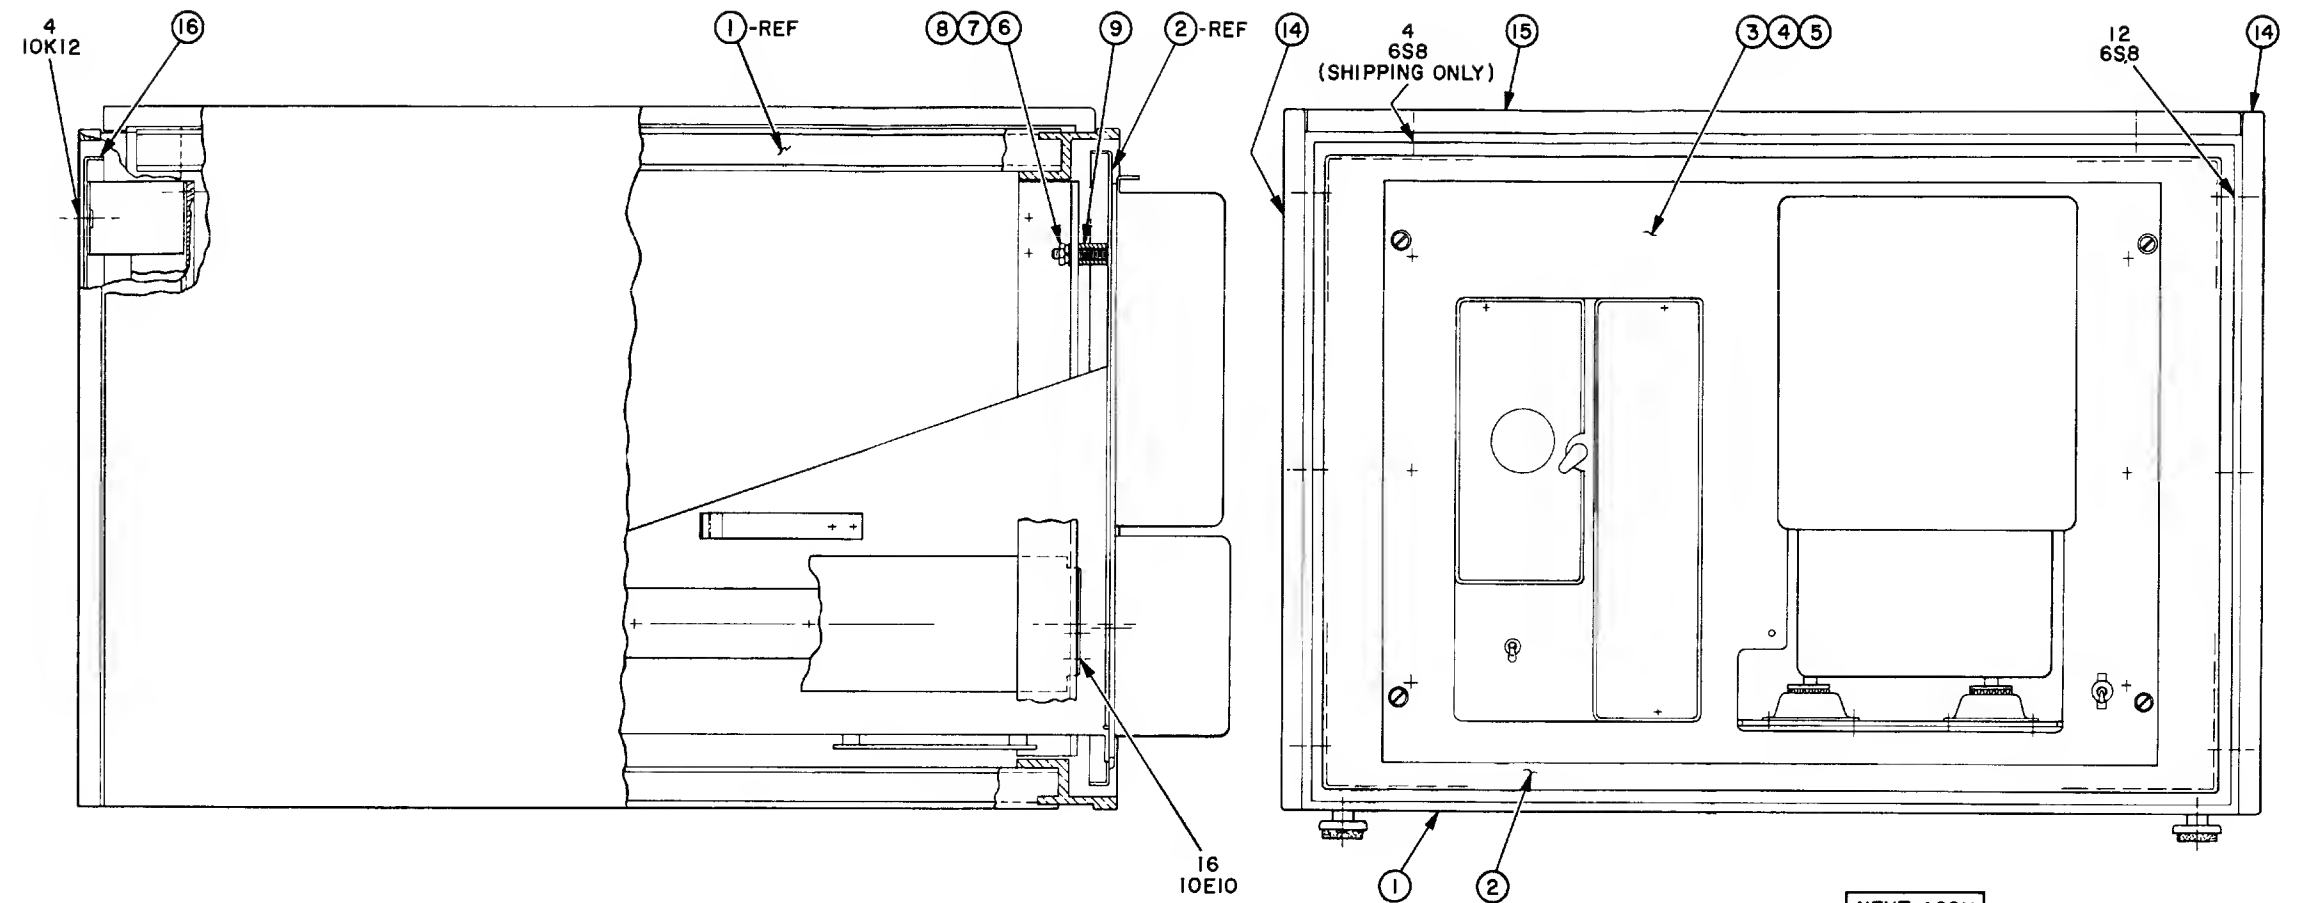

C3770

701, 702, 703

1. ITEMS 14, 15 AND 16 SHOWN IN REFERENCE ONLY AND WILL BE CALLED FOR IN "PRODUCT INDEX" - DRAWING NO. A 015 031.
2. ITEMS 17 THRU 24 ARE NOT SHOWN. (FOR LOCATION AND MOUNTING HARDWARE SEE DRAWING NO. DOI5472.)


NEXT ASSY
A015031
A014298
A013805

APPENDIX
μ-PAC DESCRIPTIONS

This appendix contains the descriptions for the following.

	Level Shift Module (Dwg. No. B011524701)
CC-152	Transfer Gate PAC
CC-272	Diode Resistor PAC

Other PAC descriptions can be found at the end of the Instruction Manual for the DDP-516 General Purpose Computer, Volume I, 3C Doc. No. 130071620.

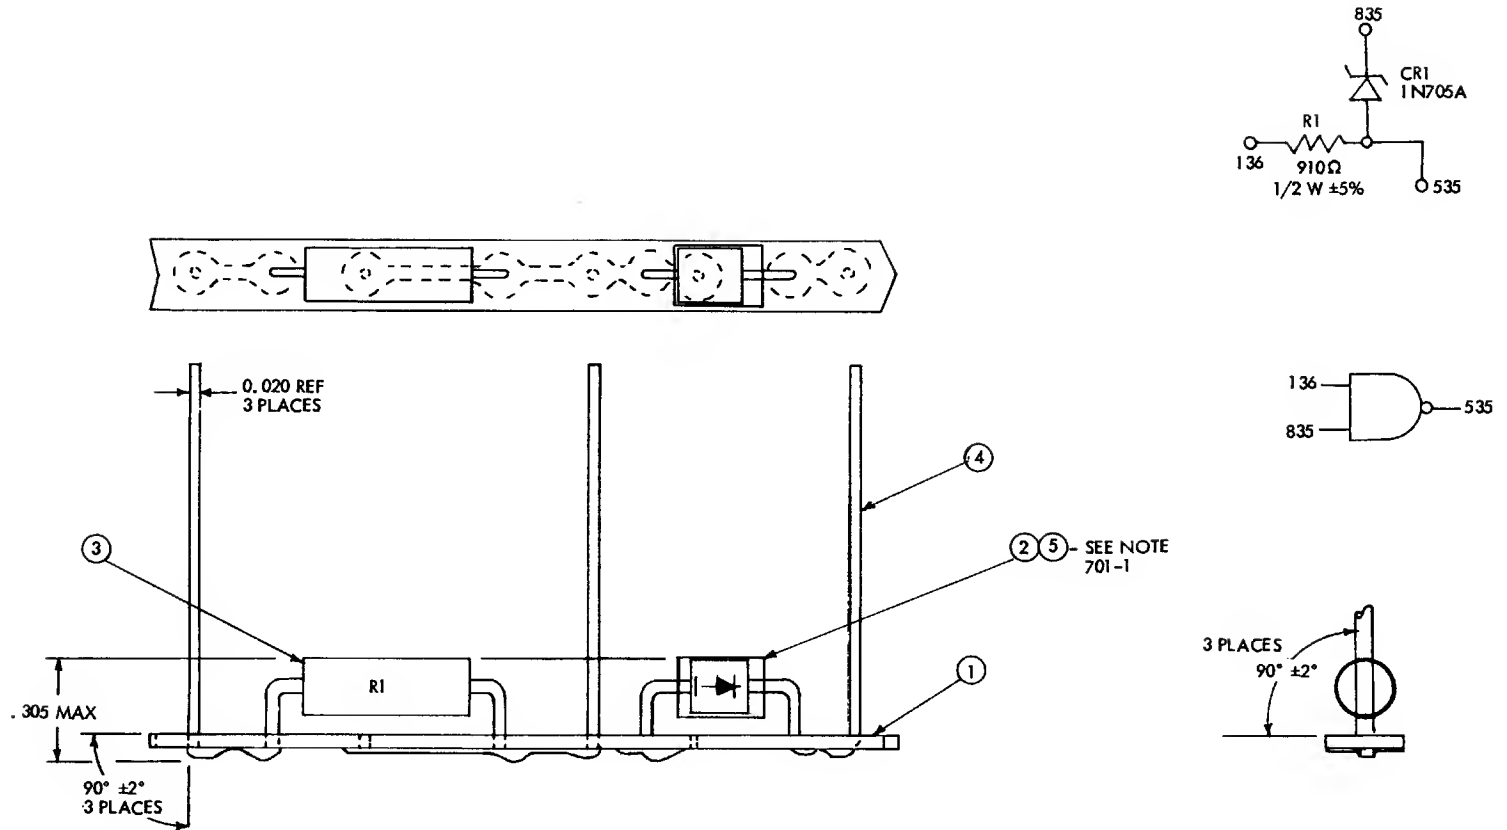

1. COVER ITEM 2 WITH ITEM 5 BEFORE INSTALLING TO ITEM 1.
2. ITEMS 2 AND 3 MAY BE MOUNTED FLUSH TO ITEM 1.

Dwg. No. B011524701 Printed Circuit Board Assembly Level Shift Module

TRANSFER GATE PAC, MODEL CC-152

The Transfer Gate PAC (Figure CC-152-1) contains 14 two-input NAND gates without collector resistors, arranged in four independent groups. Two of the groups contain four NAND gates each, with one input being common to the four gates. The other two groups contain three NAND gates each, with one input being common to the three gates. All 14 circuits provide a facility for connecting the NAND gates in parallel without decreasing the output drive capability.


The Model CC-152 PAC can be used for the common transfer control of up to 14 data signals, with the common input used as a control or strobe input. Turn-on rise time is controlled so as to have a guaranteed minimum of 50 ns with no load.

SPECIFICATIONS

<u>Frequency of Operation</u>	<u>Circuit Delay</u>
DC to 5 MHz (max)	120 ns (max) turn-on 40 ns (max) turn-off
<u>Input Loading</u>	<u>Current Requirements</u>
Individual inputs: 1 unit load each	+6V: 95 mA
Common inputs: 1 unit load per gate	<u>Power Dissipation</u>
<u>Output Drive Capability</u>	560 mW (max)
8 unit loads	

Electrical Parts List

Ref. Desig.	Description	CCD Part No.
C1	CAPACITOR, FIXED, PLASTIC DIELECTRIC: 0.033 μ F \pm 20%, 50 Vdc	930 313 016
C2-C15	CAPACITOR, FIXED, CERAMIC DIELECTRIC: 10 pF \pm 10%, 100 Vdc	930 173 204
M1-M7	MICROCIRCUIT: F-01 dual NAND gate integrated circuit	950 100 001

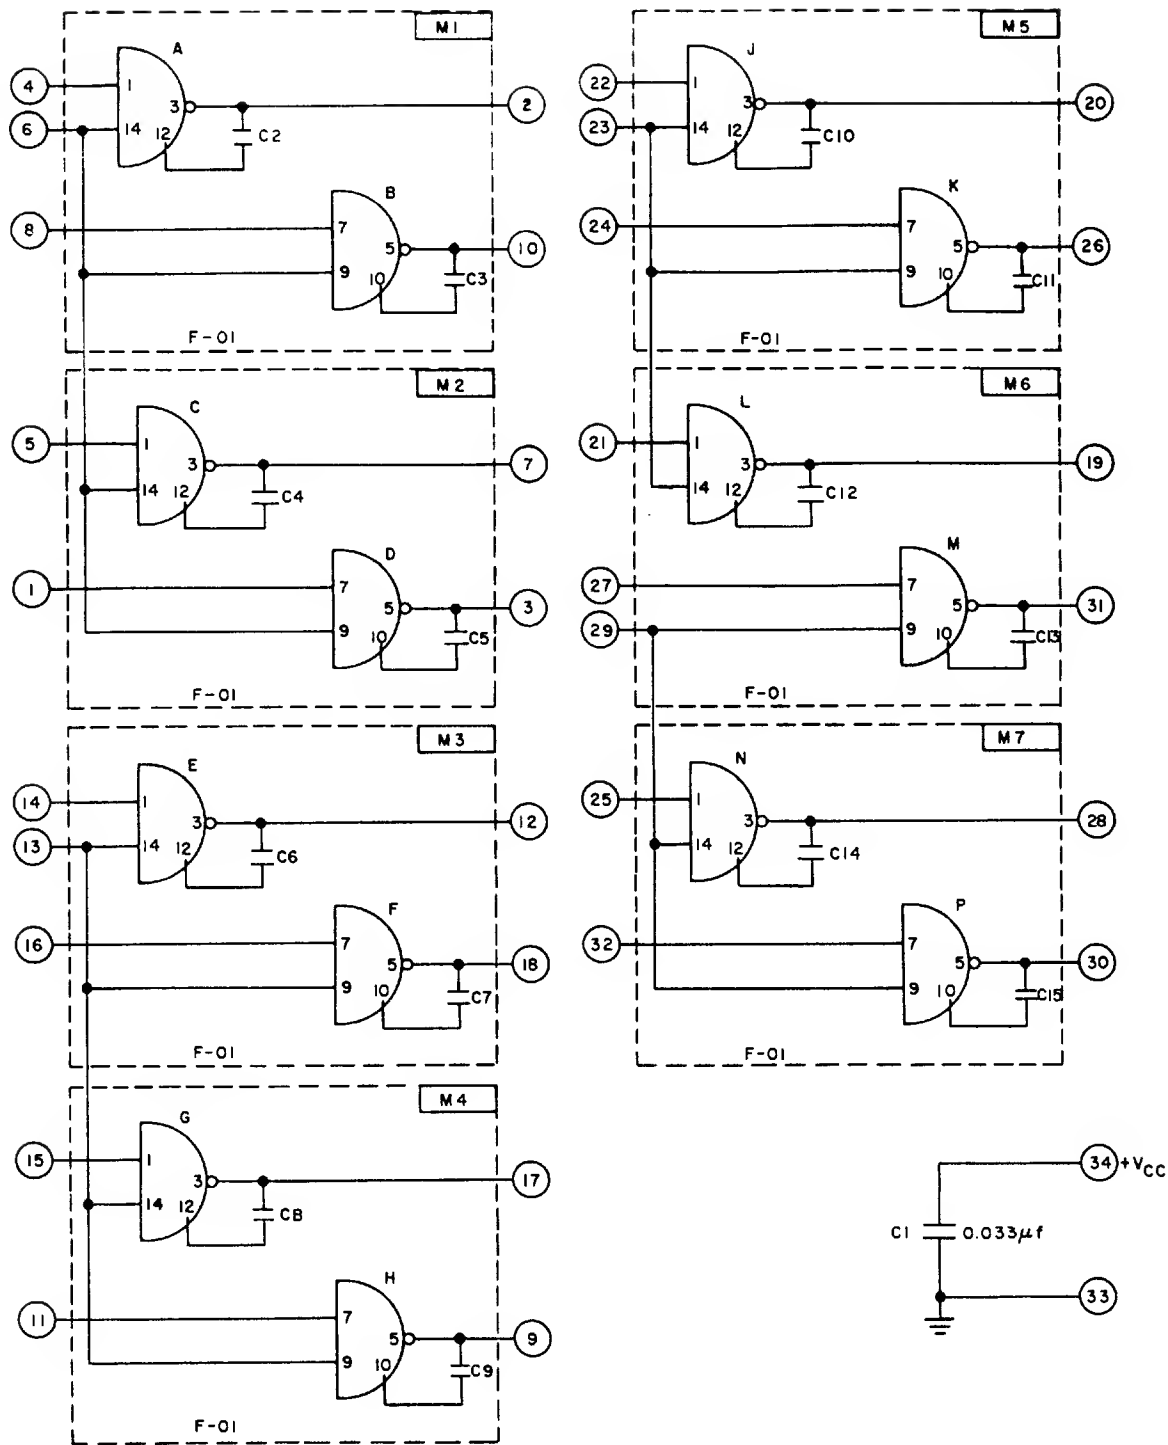

① - PIN NUMBER OF PAC

② - PIN NUMBER OF MICROCIRCUIT

M3 REFERENCE DESIGNATION OF MICROCIRCUIT

F-04 TYPE OF MICROCIRCUIT

3997

Figure CC-152-1. Transfer Gate PAC, Model CC-152, Schematic Diagram

DIODE RESISTOR PAC, MODEL CC-272

The Diode Resistor PAC, Model CC-272 (Figure CC-272-1), contains sixteen silicon diodes having common cathodes and anodes which are brought out to individual pins. There are also fourteen resistors (1K) which are pulled up to +Vcc.

SPECIFICATIONS

Current Requirements

80 mA (max) from Vcc = 5V

Electrical Parts List

Ref. Desig.	Description	CCD Part No.
R1-R14	RESISTOR FIXED COMPOSITION: 1K, 5%, 1/4W	932 007 049
CR1-CR16	DIODE SILICON	943 083 002
C1	CAPACITOR FIXED PLASTIC: 0.033 μ F . \pm 20% 50V	930 313 016

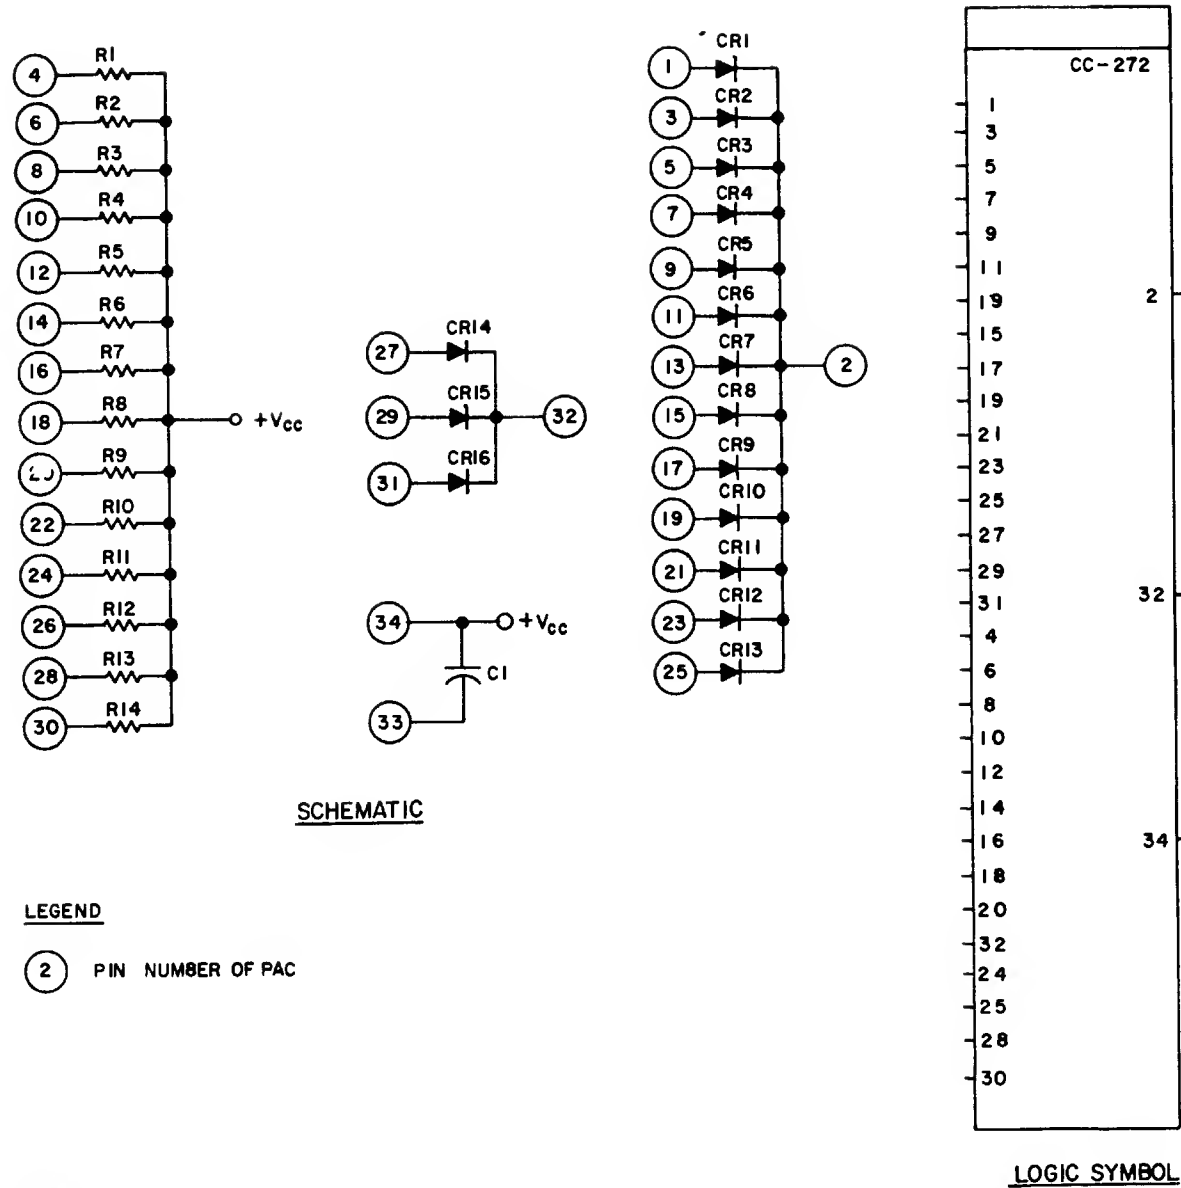


Figure CC-272-1 Diode Resistor Board Schematic

FIELD ENGINEERING MANUAL
USERS' REMARKS FORM

TITLE:

DOC. PART NO. _____

DATED _____

ERRORS NOTED:

Fold

SUGGESTIONS FOR IMPROVEMENT:

Fold

DATE _____

FROM: NAME _____

COMPANY _____ M/S _____

TITLE _____

ADDRESS _____

ZIP _____

Cut Along Line

FIRST CLASS

PERMIT NO. 39531

WELLESLEY HILLS

MA. 02181

BUSINESS REPLY MAIL

NO POSTAGE STAMP NECESSARY IF MAILED IN THE UNITED STATES

POSTAGE WILL BE PAID BY

HONEYWELL INFORMATION SYSTEMS

FIELD ENGINEERING DIVISION

141 NEEDHAM STREET

NEWTON HIGHLANDS, MA. 02161

ATT'N: FIELD ENGINEERING PUBLICATIONS

Honeywell

The Other Computer Company:
Honeywell

HONEYWELL INFORMATION SYSTEMS